


GH.

Nuts

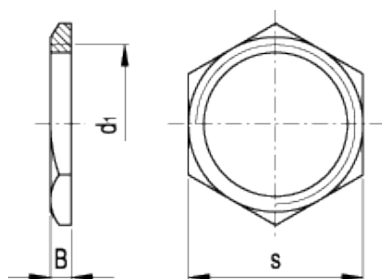

technical informations

Material
Brass.

Features and applications

GH. nuts can be used for fitting the following indicators to reservoirs with wall thickness smaller than 5 mm:

- [HGFT.](#)
- [GN 743](#)
- [GN 743.1](#)
- [HGFT.PR](#)
- [HGFT.HT-PR](#)
- [GN 744](#)
- [HFTX.](#)
- [HFTX.PR](#)
- [HCFE.](#)
- [HCFE/C](#)

Standard Elements		Main dimensions			Weight
Code	Description	d ₁	B	s	g
14991	GH. 1/4	G 1/4	6	19	9
15001	GH. 3/8	G 3/8	3	19	3
15011	GH. 1/2	G 1/2	4	26	8
15021	GH. 3/4	G 3/4	5	31	12

15031	GH. 1	G 1	4.5	37	14
15041	GH. 1¼	G 1¼	5	46	23
15051	GH. 2	G 2	6	65	40



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE