


Rotafix SD - standard str. 14-250



Tolerancer

ds		ISO	Maks. tolerance
fra og med	til		
18	30	H6/j6	0,017
30	50	H6/h6	0,032
50	80	H6/g6	0,048
80	120		0,069
120	180	H7/g6	0,079
180	250		0,090

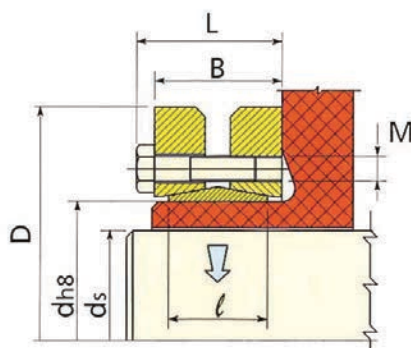

Klassisk krympeskive i 3-delt design

Ts (Nm) = Boltspændingsmoment **T** (Nm) / **F** (kN) = Overførbart drejningsmoment eller aksial kraft ved tilspændingsmoment Ts

d mm	ds mm	D mm	L mm	B mm	ℓ mm	M mm	Ts Nm	T Nm	F kN
14	10-11-12	38	15	11	9	M5	3,5	28-38-50	5-7-9
16	12-13-14	41	19	15	11	M5	4	50-70-90	9-10-13
18	14-15-16	44	19	15	12	M5	4	85-100-130	16-18-20
20	15-16-18	50	23	19	14	M5	4	130-150-200	20-22-25
24	19-20-21	50	23	19	14	M5	5	180-210-250	26-27-29
30	24-25-26	60	25	21	16	M5	6	310-340-380	26-27-28
36	28-30-31	72	27	23	18	M6	12	460-590-630	50-54-58
44	32-35-36	80	29	25	20	M6	12	630-780-860	65-74-77
50	38-40-42	90	31	27	22	M6	12	940-1100-1300	79-85-90
55	42-45-48	100	34	30	23	M6	12	1200-1500-1900	80-90-100
62	48-50-52	110	34	30	23	M6	12	1800-2200-2400	100-110-120
68	50-55-60	115	34	30	23	M6	12	2000-2500-3100	100-110-120
75	55-60-65	138	38	32	25	M8	30	2500-3200-3900	120-140-150
80	60-65-70	145	38	32	25	M8	30	3200-3900-4600	120-140-160
90	65-70-75	155	45	39	30	M8	30	4700-6000-7200	170-190-210
100	70-75-80	170	49,5	44	34	M8	30	6900-7500-9000	180-220-240
110	75-80-85	185	57	50	39	M10	59	7200-9000-11000	230-250-260
115	80-85-90	188	57	50	39	M10	59	8500-10000-12000	210-240-270
120	80-85-90	215	59	52	42	M10	59	10500-13200-14400	280-300-330
125	85-90-95	215	59	52	42	M10	59	11000-13000-15000	300-320-350
130	90-95-100	215	59	52	42	M10	59	13700-15800-18200	300-330-360
140	95-100-105	230	68	60	46	M12	100	15000-17000-20000	360-400-420
155	105-110-115	265	72	64	50	M12	100	20000-23000-26000	390-420-450
160	110-115-120	265	72	64	50	M12	100	22500-25500-28600	410-440-470
165	115-120-125	290	81	71	56	M16	250	36000-39000-44000	630-660-700
170	120-125-130	290	81	71	56	M16	250	31700-35800-40000	600-630-660
175	125-130-150	300	81	71	56	M16	250	40000-44000-49000	650-680-720
180	130-135-140	300	81	71	56	M16	250	36800-42000-46000	560-620-650
185	135-140-145	330	96	86	71	M16	250	55000-60000-65000	815-875-896
190	140-145-150	330	96	86	71	M16	250	53300-58500-63500	790-830-870
195	140-150-155	350	96	86	71	M16	250	66000-76000-82000	950-1000-1100
200	150-155-160	350	96	86	71	M16	250	73700-79800-85800	980-1000-1070
220	160-165-170	370	114	104	88	M16	250	95000-102000-110000	1200-1300-1300
240	170-180-190	405	121	109	92	M20	490	12000-140000-160000	1500-1600-1700
250	180-190-200	405	121	108	92	M20	490	160000-180000-200000	1600-1700-1800

Større størrelser op til SD500 på forespørgsel